

PRODUCT CATALOG

**DON'T PUT YOUR PROJECT AT RISK.
CHOOSE PIERESEARCH®
FOR ALL YOUR REBAR
AND REBAR CAGE
ALIGNMENT PRODUCTS.**

Visit pieresearch.com to see our full line of alignment products, download spec kits, watch how-to videos and request free samples.

pieresearch.com • stanagee@pieresearch.com


817.277.3738 • 817.275.2335 Fax

New York Office contact Herb Engler

718.786.8814 • herbengler@pieresearch.com

PIERESEARCH®

Manufacturer of Quality Concrete Accessories

Proudly Made in the USA! 

EST. 1986

**PIERESEARCH® SERVES THE DEEP
FOUNDATION AND EARTH RETENTION
INDUSTRIES**

**PIERESEARCH SPECIALIZES IN REBAR
REINFORCING ALIGNMENT AND CENTRALIZER
PRODUCTS FOR EVERY CONSTRUCTION NEED.**

Established in 1986 Piereseach is the industry leader in rebar reinforcing alignment products. We provide durable, reliable, economical, proven and tested alignment products for drilled shafts, micropiles, augercast piles, soil nails, and rebar-reinforced earth retention anchors. Our new Unibar® Centralizer products are specifically designed for the installation of soil nails, and related earth retention elements. We are committed to pursuing excellence in quality, on-time service, customer partnerships, and product innovation. Our products are proudly made in the USA!

QUALITY YOU CAN RELY ON

Construction professionals in the commercial, industrial, highway, educational, governmental, sports & entertainment, retail, food & beverage, marine, energy & power production, and transportation industries rely on Piereseach's high quality, easy-to-install, noncorrosive plastic products. All our products are manufactured in a Fort Worth facility and meet the highest quality standards set by the Concrete Reinforcing Steel Institute and American Concrete Institute. We have integrated systems for every job and will manufacture custom accessories to meet any project specification.

BUILDING STRONG RELATIONSHIPS

We strive to conduct our day-to-day business with clear, open communication, keep our promises and place excellence in customer service above all. Over the years we have developed solid relationships with our customers, industry professionals, and manufacturers to deliver innovation and products that are built tough. We combine our product expertise and industry experience to deliver the optimal solution to any project, on time and within budget.

**QUALITY PRODUCTS.
HONEST SERVICE.
GREAT VALUE.
PIERESEARCH®
CHOOSE PIERESEARCH® FOR ALL
YOUR REBAR AND REBAR CAGE
ALIGNMENT PRODUCTS.**

**Our alignment products are
unique one-piece designs,
made of noncorrosive
plastic, install in seconds
and are built tough!**

**DURABLE. ECONOMICAL.
RELIABLE. PROVEN.**

**Visit piereseach.com to see our full line of
alignment products, download spec kits, watch
how-to videos and request free samples.**

**SEE OUR INFORMATIVE DRILLED
SHAFT, WHEELS & BOOTS, AND
UNIBAR® VIDEOS.**

**piereseach.com
stanagee@piereseach.com
817.277.3738 • 817.275.2335 Fax**

**New York Office:
contact Herb Engler
718.786.8814
herbengler@piereseach.com**

PIERESEARCH®
Manufacturer of Quality Concrete Accessories
Proudly Made in the USA! 
EST. 1986

Quick-Lock HD® Heavy Duty Pier Wheel

Unique One-Piece Design!

Quick-Lock HD® installation is a snap and is designed to properly position a reinforcing steel cage in a drilled shaft. Without proper alignment, the rebar cage cannot perform the function for which it was designed.

Quick-Lock HD® pier wheels are made of durable, noncorrosive plastic and fit numbers 3 through 7 rebar ties. They are also perfect for a variety of other applications where concrete cover must be maintained.



The table below illustrates the recommended number of Quick-Lock HD® wheels to be used on a per shaft basis.

The actual number can vary subject to the number of vertical bars of the reinforcing steel cage.

The structural engineer is the governing authority. When in doubt, please check with the structural engineer.

RECOMMENDED QUICK-LOCK HD® WHEELS PER REINFORCING CAGE				
Pier Shaft Depth In Feet	Pier Shaft Diameter In Inches			
	Up to 48"	49" to 72"	73" to 96"	97" to 120"
0' to 12'	8	12	16	20
13' to 24'	12	18	24	30
25' to 36'	16	24	32	40
37' to 48'	24	36	48	60
49' to 60'	28	42	56	70
61' to 72'	36	54	72	90
73' to 84'	40	60	80	100
85' to 96'	48	72	96	120
97' to 108'	52	78	104	130
109' to 120'	60	90	120	150
121' to 132'	64	96	128	160
133' to 144'	72	108	144	180

Part No.

Description

4QLHD*	4" Quick-Lock HD® wheel provides 2 inches of concrete cover* and fits rebar sizes #3 thru #7
6QLHD**	6" Quick-Lock HD® wheel provides 3 inches of concrete cover** and fits rebar sizes #3 thru #7
7QLHD*	7" Quick-Lock HD® wheel provides 3 inches of concrete cover* and fits rebar sizes #3 thru #7
8QLHD**	8" Quick-Lock HD® wheel provides 4 inches of concrete cover** and fits rebar sizes #3 thru #7
12QLHD**	12" Quick-Lock HD® wheel provides 6 inches of concrete cover** and fits rebar sizes #3 thru #7

*Actual Clearance or Concrete Cover is measured from the outside of the circle tie, spiral, etc. of the reinforcing steel cage to the side of the drilled shaft.

**Nominal Clearance or Concrete Cover is measured from the outside of the vertical bar of the reinforcing steel cage to the side of the drilled shaft.

Quick-Lock® Pier Wheel

Unique One-Piece Design!

Quick-Lock® Pier Wheel installation is a snap and is designed to properly position a reinforcing steel cage in a drilled shaft. Without proper alignment, the rebar cage cannot perform the function for which it was designed.

Quick-Lock® Pier Wheels are made of durable, noncorrosive plastic and fit numbers 3 through 7 rebar ties. They are also perfect for a variety of other applications where concrete cover must be maintained.

Visit pierresearch.com



The table below illustrates the recommended number of Quick-Lock® Pier Wheels to be used on a per shaft basis.

The actual number can vary subject to the number of vertical bars of the reinforcing steel cage.

The structural engineer is the governing authority. When in doubt, please check with the structural engineer.

RECOMMENDED QUICK-LOCK® WHEELS PER REINFORCING CAGE

Pier Shaft Depth In Feet	Pier Shaft Diameter In Inches				
	Under 30"	31" to 48"	49" to 72"	73" to 96"	97" to 120"
0' to 12'	9	12	18	24	30
13' to 24'	14	18	27	36	45
25' to 36'	18	24	36	48	45
37' to 48'	23	30	45	60	75
49' to 60'	27	36	54	72	90
61' to 72'	32	42	63	84	105
73' to 84'	36	48	72	96	120
85' to 96'	41	54	81	108	135
97' to 108'	45	60	90	120	150
109' to 120'	54	72	108	144	180
121' to 132'	59	78	117	156	195
133' to 144'	63	84	126	168	210

Part No.

Description

4QLPW	4" Quick-Lock® wheel provides 2 inches of concrete cover and fits rebar sizes #3 thru #7
6QLPW	6" Quick-Lock® wheel provides 3 inches of concrete cover and fits rebar sizes #3 thru #5
8QLPW	8" Quick-Lock® wheel provides 4 inches of concrete cover and fits rebar sizes #3 thru #7

All Quick-Lock® Pier Wheels provide Actual Clearance.

Actual Clearance or Concrete Cover is measured from the outside of the circle tie, spiral, etc. of the reinforcing steel cage to the side of the drilled shaft.

Quick-Lock Pier Boot® & Quick-Zip Bar Booster®

Unique One-Piece Designs!

QUICK-LOCK PIER BOOT®

Designed to support a reinforcing steel cage off the floor of a bored/drilled shaft. Installation is accomplished in seconds by simply pushing the Quick-Lock Pier Boot® onto the end of a vertical bar of the rebar cage.

Part No.	Description
3PB	3" PIER BOOT: 3 inches of concrete cover fits rebar sizes #5 thru #14
6PB	6" PIER BOOT: 6 inches of concrete cover fits rebar sizes #6 thru #14



3PB Quick-Lock
Pier Boot®



6PB Quick-Lock
Pier Boot®



Quick-Zip
Bar Booster®

QUICK-ZIP BAR BOOSTER®

Designed to support a reinforcing steel cage within a bored/drilled shaft with a 3" concrete cover requirement. Attach to rebar of any size. The zip tie used for attachment is made of 170 pound tensile strength resin. Installation is accomplished in seconds by simply positioning the Quick-Zip Bar Booster® on the end of a vertical bar of the cage and pulling the zip tie taut.

The recommended spacing for installation of the Pier Boot and Bar Booster is one every other vertical bar for piers under 48 inches in diameter or one on every vertical bar for piers 48 inches in diameter and over.

Quick-Lock Pier Boot®



Quick-Zip Bar Booster®



Revolutionary New Quick-Lock® & Adjustable Quick-Lock® Unibar® Centralizers

**Soil Nailing - Tendon/Rebar
Alignment Support**

QUICK-LOCK® and ADJUSTABLE QUICK-LOCK® UNIBAR® CENTRALIZERS

The answer to uniform reinforcement steel spacing requirements in single-bar foundation/tieback elements. To achieve proper design strength in any drilled and grouted/concreted hole, the tendon/rebar or anchor material must be centered in the shaft to allow minimum coverage throughout the length of the element.

APPLICATION

QUICK-LOCK® and ADJUSTABLE QUICK-LOCK® UNIBAR® CENTRALIZERS are designed to keep the tendon/bar centered in the bore/drill hole to allow for minimum grout/concrete coverage and do not impede flow of grout within bore/drill hole and around tendon. They are made of durable non-corrosive plastic and consisting of two identical halves that are fast and easy to snap together. QUICK-LOCK® and ADJUSTABLE QUICK-LOCK® UNIBAR® CENTRALIZERS will accommodate Single Bar, Multi-Bar/Strand Anchors, Encapsulated (DCP) Anchors, and Steel or Plastic Pipe Applications. They are ideal for Soil Nails, Rock/Soil Anchors, Micro-Piles, and Auger-Cast Piles with single tension bars.



ADVANTAGES

- 2 identical halves
- easy to snap together
- made of durable non-corrosive plastic
- can be attached with zip ties or tie wire
- offset to fit between rebar threads
- keeps single tendon/bar centered within a drill hole
- ideal for soil nail applications
- no nuts or bolts required
- lightweight and economical

ASSEMBLY

Quickly assemble the QUICK-LOCK® and ADJUSTABLE QUICK-LOCK® UNIBAR® CENTRALIZER by easily snapping the two identical halves together over the tendon/rebar and tying it on with tie wire.



PLACEMENT







The lowest QUICK-LOCK® and ADJUSTABLE QUICK-LOCK® UNIBAR® CENTRALIZER should be installed approximately 1 foot from the end of the tendon/bar material. Each successive UNIBAR® CENTRALIZER should be placed at no greater than 10-foot intervals. The upper UNIBAR® CENTRALIZER should be approximately 1 foot below grout/concrete surface.

Part No.	Description
4-6UBC	4" O.D. fits rebar sizes #5 thru #6
4-8UBC	4" O.D. fits rebar sizes #7 thru #8
4-1.5IN-UBC	4" O.D. with 1.5" I.D. Hub
4-2IN-UBC	4" O.D. with 2" I.D. Hub
4-2.5IN-UBC	4" O.D. with 2.5" I.D. Hub
6-6UBC	6" O.D. fits rebar sizes #5 thru #6
6-8UBC	6" O.D. fits rebar sizes #7 thru #8
6-1.5IN-UBC	6" O.D. with 1.5" I.D. Hub
6-2IN-UBC	6" O.D. with 2" I.D. Hub
6-2.5IN-UBC	6" O.D. with 2.5" I.D. Hub
8-6/11UBC	8" O.D. adjustable I.D. Hub fits rebar sizes #6 thru #11







PIERESEARCH®
Manufacturer of Quality Concrete Accessories
Proudly Made in the USA!

**See the following page for more
Unibar® information**

UNIBAR® CENTRALIZER

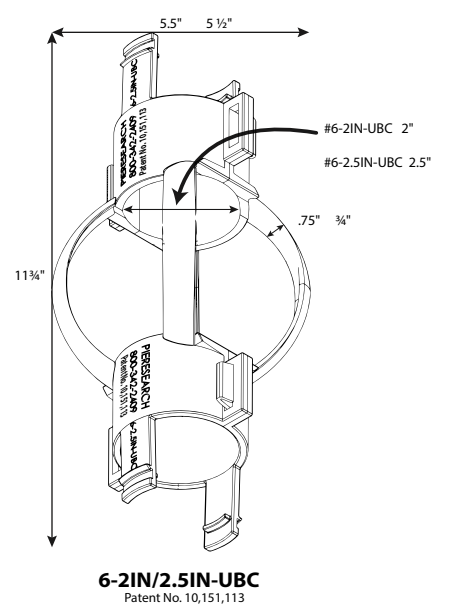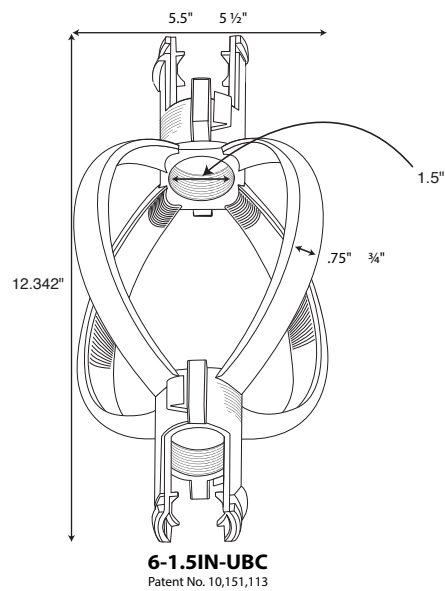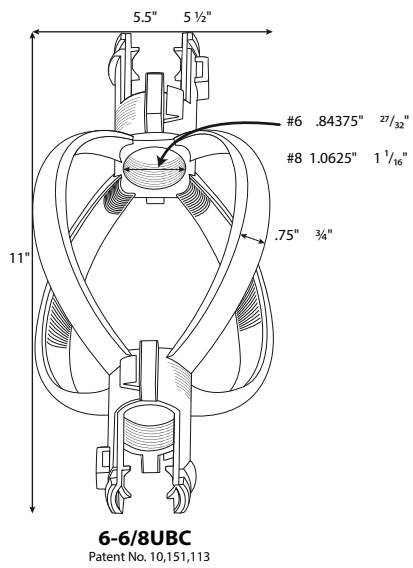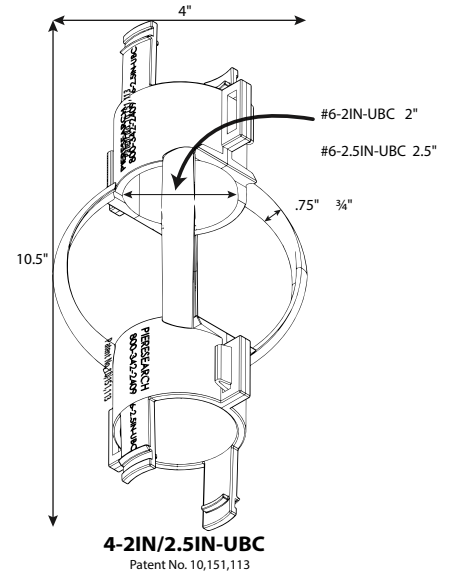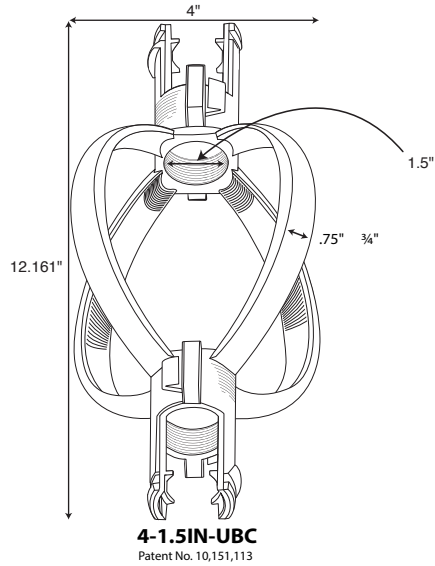
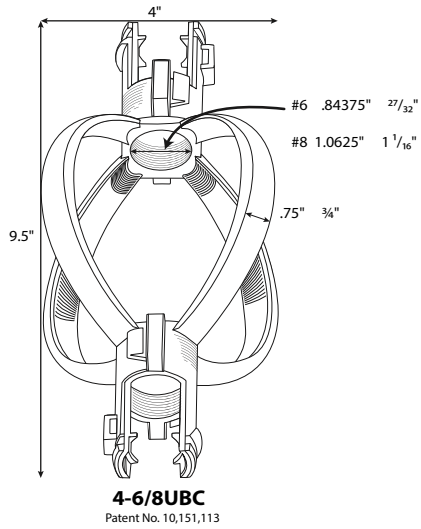


ADJUSTABLE UNIBAR® CENTRALIZER

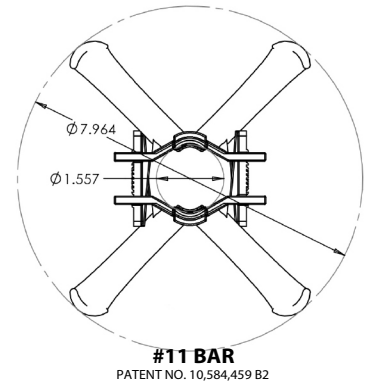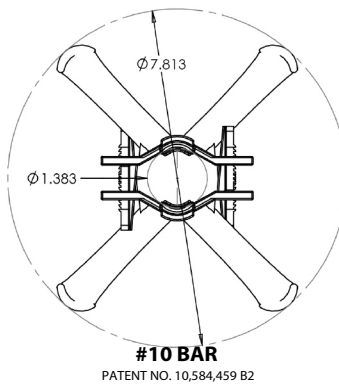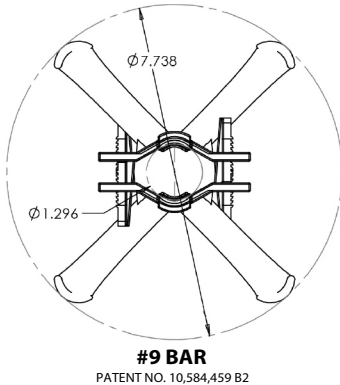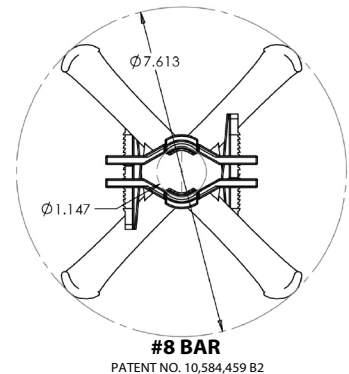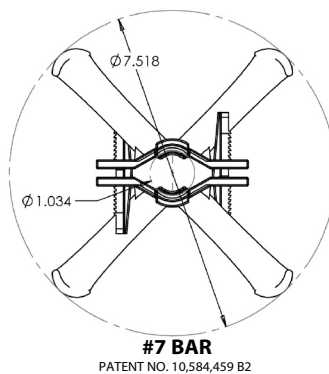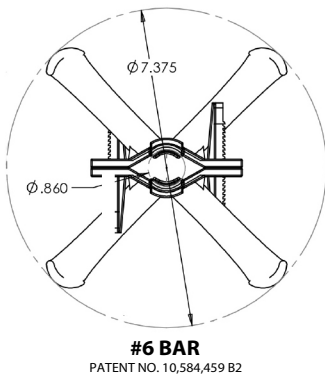

ADJUSTABLE QUICK-LOCK® UNIBAR® CENTRALIZERS

We have long known about the importance of proper alignment for reinforcing cages in drilled shaft construction. It is no less important to provide the same quality assurance for related deep foundation and earth support construction applications. In order to achieve proper design strength in any drilled and grouted hole the bar or tendon must be centered in the drilled hole to assure proper grout or concrete coverage throughout the design length of the element. Pieresearch®, a long-time industry leader in alignment/centralizer products for the deep foundations industry has developed a new, adjustable, centralizer for augercast pile, micropile, soil nail, and tieback installation. The ADJUSTABLE QUICK-LOCK® UNIBAR® CENTRALIZER is the answer to uniform spacing requirements across a wide range of diameters.

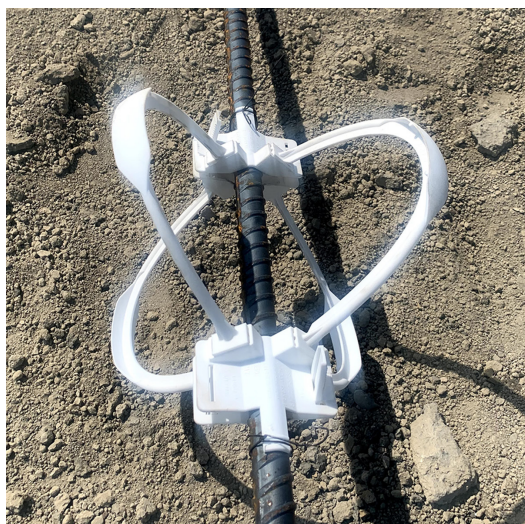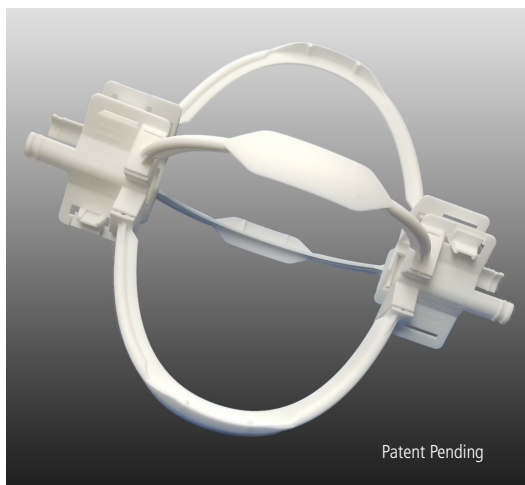

APPLICATION & ASSEMBLY

ADJUSTABLE QUICK-LOCK® UNIBAR® CENTRALIZERS are made of lightweight, durable, non-corrosive plastic and consist of two identical halves that are fast and easy to snap together. The adjustable centering device will accommodate single bar, single and multi-strand anchors, encapsulated anchors (DCP), and are suitable for steel or plastic pipe applications. The adjustable UNIBAR® can be attached with zip ties or tie wire, and are offset to fit between rebar threads. They are lightweight, economical and do not require nuts or bolts for installation. There are 3 different new parts to fit shafts ranging from an O.D. of 10" to 24". All 3 parts are adjustable to fit bar sizes #6 thru #18:

Part No.	Description
1011-6/18UBC	10/11" shafts fits bar sizes #6 thru #18
1415-6/18UBC	14/15" shafts fits bar sizes #6 thru #18
1617-6/18UBC	16/17" shafts fits bar sizes #6 thru #18

100 parts per bag. Bag weight approx. 22 pounds.
16 bags per pallet.

MANUFACTURER and ORDERING

For detailed information about the ADJUSTABLE QUICK-LOCK® UNIBAR® CENTRALIZER and the wide range of alignment/centralizer aids for the deep foundation and earth retention industries visit or call:


Pieresearch.com
stanagee@pieresearch.com
817-277-3738
501 E Main Street
Arlington, TX 76010

Visit our website for for spec kits, how to videos and ordering information. All Pieresearch concrete accessories are proudly made in the United States of America.







WARRANTY (ACCESSORIES)

Limited Warranty. Pieresearch warrants that Products manufactured by it will be free from defects in material and workmanship for a period of 60 days from the date of shipment. Any claim under this warranty must be made in writing within such warranty period. If any Products covered by a timely claim are found to be defective, Pieresearch will, within a reasonable time replace the Products. Unless authorized in advance by Pieresearch in writing, Pieresearch will not accept any charges for the return of any Products for warranty purposes. This limited warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Pieresearch. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS. PIERESearch MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.


Part No. 1011-6/18UBC









- For shafts with a 10/11" O.D.
- Fits rebar sizes #6 thru #18




Part No. 1415-6/18UBC









- For shafts with a 14/15" O.D.
- Fits rebar sizes #6 thru #18



Part No. 1617-6/18UBC



- For shafts with a 16/17" O.D.
- Fits rebar sizes #6 thru #18

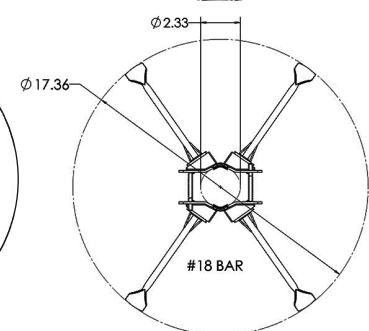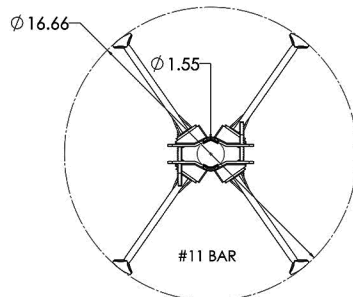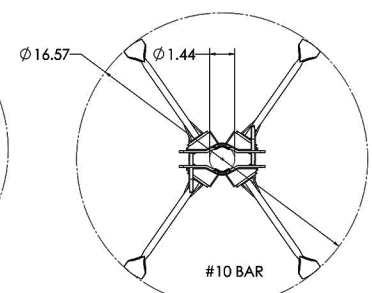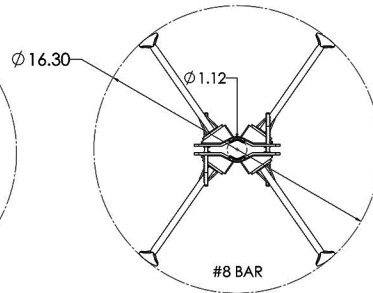

PATENT PENDING

PIERESEARCH[®]

**PIERESEARCH[®] IS A PROUD MEMBER OF
THESE PROFESSIONAL ASSOCIATIONS:**



NCSEA

National Council of Structural Engineers Associations
And Affiliated State Structural Engineering Associations



ASCE

AMERICAN SOCIETY OF CIVIL ENGINEERS



American Concrete Institute

Always advancing

Northeast Texas Chapter



The International Association of Foundation Drilling